

# SYNTHETIC LEATHER

VOL. I



BRITTAS  
**130**



SELLIN  
**130**



BRITTAS  
**164**




SELLIN  
**164**




BRITTAS  
**162**




SELLIN  
**162**




BRITTAS  
**140**




SELLIN  
**140**





BRITTAS  
**161**

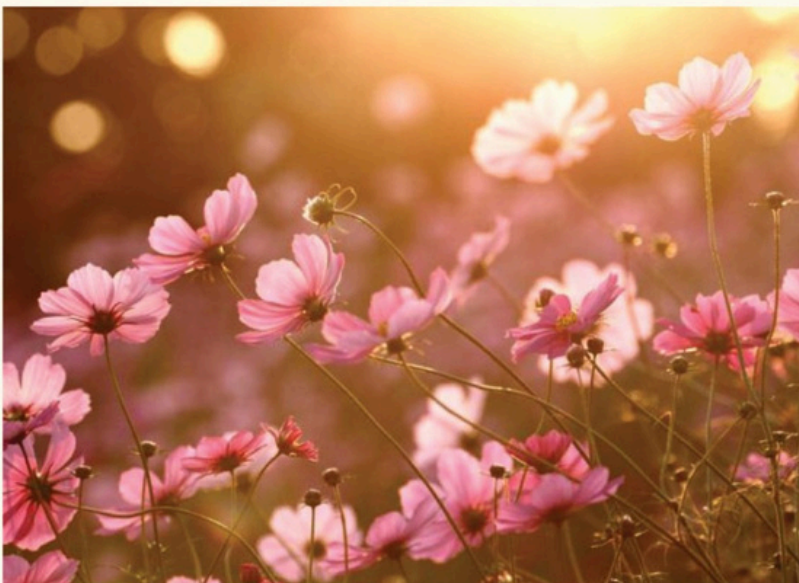

BRITTAS  
**021**



BRITTAS  
**010**

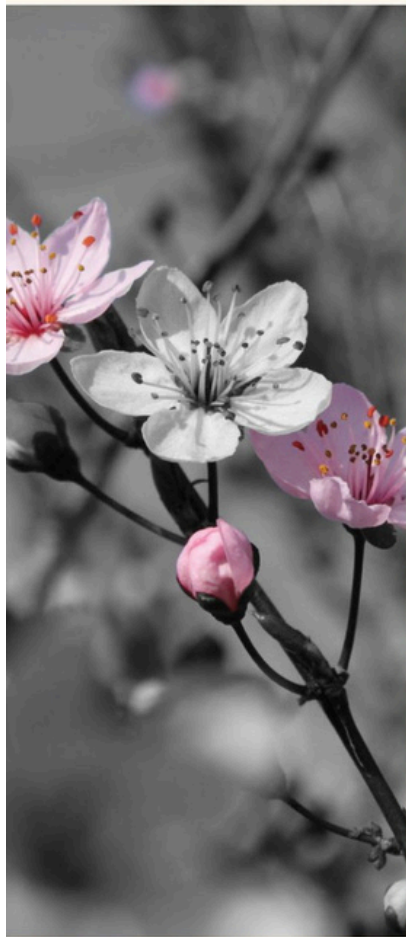


BRITTAS  
**160**




SELLIN  
**160**




BRITTAS  
**163**




SELLIN  
**163**




BRITTAS  
**090**




SELLIN  
**090**



SELLIN  
**161**




BRITTAS  
**080**



SELLIN  
**080**




SELLIN  
**021**




BRITTAS  
**040**




SELLIN  
**040**



SELLIN  
**010**



BRITTAS  
**060**



SELLIN  
**060**



# TECHNICAL DATA

	BRITTAS	SELLIN
Composition	100% PVC	100% PVC
Width [cm]	137	137
Weight [gr/m <sup>2</sup> ] (ISO 2286 - 2)	764	736
Thickness	1.25mm ± 0.05mm	1.25mm ± 0.05mm
Tensile Strength [N] (EN ISO 1421) Warp   Weft	471   211	597   467
Tear Strength [N] (EN ISO 13937 - 3) Warp   Weft	37   45	44   54
Bursting Strength [kpa] (ISO 13938 - 1)	716	1,327
Abrasion Resistance [rubs] (EN ISO 12947 - 2)	> 350,000	> 350,000
Color Fastness to Artificial Weathering [grade] (BS EN ISO 105 - B04)	8	8
Color Fastness to Rubbing [grade] (BS EN ISO 105 E02) - max 5 Dry Rubbing   Wet Rubbing	4 - 5   4 - 5	4   4 - 5
Extreme Working Temperature (-30°C / +70°C)	Pass	Pass
Anti Mildew (SAN BIO - 12/94)	Pass	Pass
Soil & Stain Release [grade] (AATCC 130)	5	5
Water Repellency [grade] (AATCC 22) - Spray Test	70	70
Hydrostatic Pressure Test (AATCC 128)	79	> 130
Weatherability [hours] (AST G53 - 96) - American Standard	1,000	1,000
<b>FLAMMABILITY</b>		
○ Cigarette (BS EN 1021 - 1)	○ Pass	○ Pass
○ Match (BS EN 1021 - 2)	○ Pass	○ Pass
○ MVSS Horizontal (MVSS 302)	○ Pass	○ Pass
○ FAA Vertical (FAA 25.853)	○ Pass	○ Pass

Stock may vary from sample in color & texture



Easy Maintenance



Water Proofing



Flame Retardant



Flexibility



UV Resistance



SCAN ME



www.sunproof.co.id

produced by:



Jalan Mantingan, Desa Langon RT 12 RW 05, Kecamatan Tahunan,  
Kabupaten Jepara, Central Java, 59425, INDONESIA

MORE CATALOGUES



export@horestco.com  
www.horestco.com  
628551065899

